


STC-730S

PTT Over Cellular
Handheld with
Display, Android





INSTRUCTION MANUAL



CONTENTS

1 Description	2
1.1 Back key.....	2
1.2 PTT key.....	2
1.3 Side key 1	2
1.4 Side key 2	2
1.5 UP key.....	3
1.6 Down Key.....	3
1.7 Menu Key.....	3
1.8 Earphone.....	3
1.9 Programming.....	3
2 User Guid.....	4
2.1 Install the battery and SIM card.....	4
2.2 Basic use.....	4
2.3 Menu Description	4
2.3.1 Main menu	4
2.3.2. Settings menu.....	5
3 Description of the LED.....	6

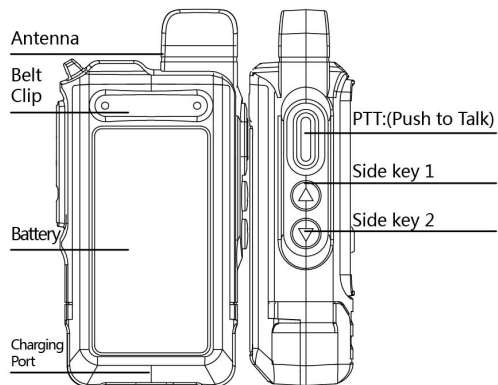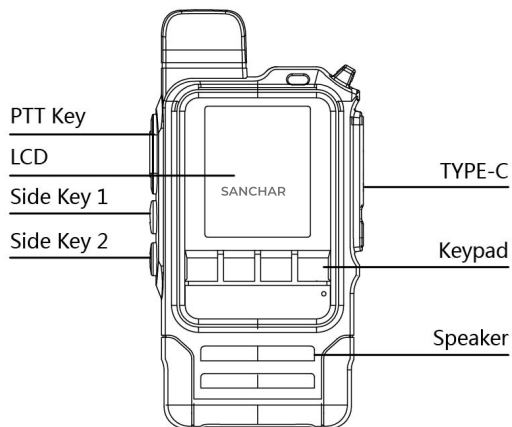

Description

1.1 BACK key

- A. Press and hold the BACK button for 4 second to turn on/off this radio.
- B. Press to return to the previous menu.

1.2 PTT Key

- A: In standby mode (green light flashing slowly), press the PTT key to initiate a call (red light on).
- B: During the call, when radio receiving voice (green light on), press and hold the PTT key to apply for voice control (red light on), release the PTT key to release the voice control, and return to the waiting state (green light flashing slowly).

1.3 Side Key 1

Side Key 1 is programmable, can be defined as a specific function by the PTT App.
For example, click to enter Group Select.

1.4 Side Key 2

Side Key 2 is programmable, can be defined as a specific function by the PTT App.
For example, click to Member Select.

1.5 UP Key

When you enter the menu, group selection, or member selection, press the up key to view options, groups, or members.

1.6 Down Key

When you enter the menu, group selection, or member selection, press the down key to view options, groups, or members.

1.7 Menu Key

Press the key to settings mode and other options.

1.8 Earphone

Plug in the matching earphone and press the PTT key on the earphone to initiate a call, release the PTT key to cancel the call.

When a call is made, you can use a earphone to answer your voice.

1.9 Programming

Radio data can be programmed with TYPE-C programming cable through TYPE-C port.

2.User Guide

2.1 Install the battery and SIM card

Please insert a valid SIM card (user identification card) into the radio before using.

2.2 Basic use

A. Power on: While radio is off, press and hold the BACK key for 4 seconds, radio will be turn on.

B. Power off: While radio is on, press and hold the BACK key for 4 seconds, radio will be turn off.

C. Low Battery Reminder: When the battery level is too low (less than 3.5V), there will be a voice prompt to remind the user to charge the battery.

2.3 Menu Description

2.3.1 Main menu: While radio is in the main page, press the menu key to enter the main menu, use the Up/Down key to select the function, press the menu key to confirm, and press the back key to return to the main page.

2.3.2. Settings menu:

A. Automatic Login at Startup: While radio is in the main page, press the menu key to enter the menu, use the Up/Down key to select, press the menu key to confirm, and press the back key to return to the main page.

B. Power Saving Mode: While radio is in the main page, press the menu key to enter the menu, use the Up/Down key to select the power saving mode option, use the menu key to confirm, and press the back key to return to the main page.


C. Network Standard: While radio is in the main page, press the Menu key to enter the menu, use the Up/Down key to select the mobile data option, use the menu key to confirm, and press the back key to return to the main page.

D. Network: While radio is in the main page, press the Menu button to enter System Menu, then press the Up/Down button to search and select, go to Cellular Networks, and select the prefer network type. Press the Back button to go back to the main page.

E. Backlight Mode: While radio is in the main page, press the Menu button to enter System Menu, then press the Up/Down button to search and select, go to Backlight, the Backlight On/Off, Front Size, and Screen Sleep features can be set here. Press the Back button to go back to the main page.

3.Description of the LED

Device Status	LED Status	Time
Programming	Red	
Power On Status/ Network searching Status	Green light flashing	1 Second On, 0.5 Second Off
Stand by State	Green light flashes Slowly	1 Second On, 3.5 Second Off
Start the call Status	LED Status	Time
Answer Voice Status	Red	





SANCHAR WIRELESS COMMUNICATIONS LTD.

📍 X-47, Okhla Industrial Estate Phase 2, South East Delhi, Delhi-110020

☎ +91-11-4054 7324 ✉ info@sancharcomm.in 🌐 www.sancharcomm.in