

# HOODON IP BOX CAMERA




## IP-903-ID/IP-903-OD

DAY & NIGHT IP BOX CAMERA WITH IP-66

### Feature:

- ◆ Support TCP/IP, HTTP, RTP, RTSP, UDP, DHCP, FTP, ARD, DNS
- ◆ On Screen Display
- ◆ Support Static/Dynamic IP
- ◆ Remote Configuration and Status Using Web Based Tool
- ◆ Remote System Update Over Network
- ◆ PC Application Client With Channel Recording Feature
- ◆ Viewer Through HTTP System Configuration Setting/Streaming
- ◆ Day and Night Vision
- ◆ Automatic IRIS Control for Varifocal Lens
- ◆ Housing- Plastic/Aluminum with IP-66
- ◆ Internal Fan, Heater and Sun Shield for Out Door Camera
- ◆ Multi Level User ID/Password

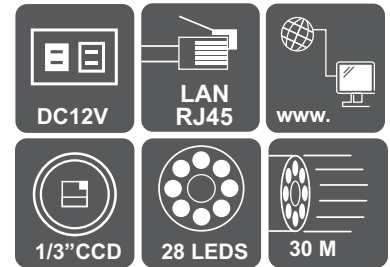

### Specification:

	NTSC	PAL
Signal Type	NTSC	PAL
CCD Sensor	1/3" CCD/CMOS	
Image Signal Process	Digital Signal Processing System	
Lens	C/CS Board Lens 3.8 mm/3.6 to 10mm Varifocal	
Remote Projection	D1 : 729 x 480	D1 : 720 x 576
Frame	25 FPS in all Resolution	
Effective Pixel	752 (H) x 582 (V)	
Power Consumption	540mA, IR on DC 12V/P.O.E.	
Network/Physical Layer	10/100M base Tx Ethernet	
Compression	H.264/MJPEG/MPEG-4	
I/O Terminal	Power input, RJ-45 network port, Video Output port, Audio I/O Port, Full Duplex	
Minimum illumination	0.7 Lux in case of D1 Resolution Camera	
S/N Ratio	Better then 50 dB	
Streaming	Dual Compressed Stream	
OSD	Yes	
Alarm	1 Digital Input, 1 Relay Output	
Audio Compression	G.726/G.711	
Pre/Post Alarm	Yes	
Shutter	AUTO:1/60s TO 1/10,000s	AUTO: 1/50s TO 1/10,000s
Encryption	HTTP (SSL/TSL)	
Operating Temperature	-10°C ~+ 50°C	
Simultaneous Connection	5 Users	
Automatic Exposure	Automatic/Electronic Level Control	
Motion Detection Zone	4 Zone	
Auto Gain & Backlight	Yes	
White Balance	Yes	