


HOODON IP PTZ CAMERA



FEATURE

- High quality with multi-function Analog and Digital Zoom
- Alarm Input/Output”
- Auto IRIS Control
- Remote System Update Over Network

IP-2251PT-ID/IP-2251PT-OD

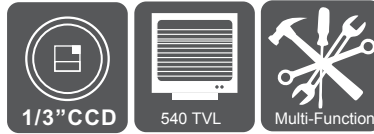

- Simultaneous Connection-5 Users
- Web Client Viewer
- PC Application Client with Channel
- Remote Configuration & Status
- Support Static/Dynamic IP
- TCP/IP, HTTP, RTP, RTSP, UDP, DHCP, FTP Protocol
- 10/100 Base Tx Ethernet
- HTTP (SSL/TSL) Encrypted
- Multi Level User ID/Password
- 256 Dome ID and Minimum 9 Groups
- DNR (Digital Noise Reduction)
- Day and Night Vision
- Auto/Zooming/1 Push/Manual Focus
- Internal Fan, Heater

SPECIFICATIONS

Mode	NTSC	PAL
Pick Up Element	1/3" CCD/1/4 CCD/CMOS or better	
Image Signal Process	Digital Signal Processing System	
Number Of Pixel	768 (H) × 494 (V)	752 (H) × 582 (V)
Privacy Zone	8 Zones	
Horizontal Resolution	Minimum 704 x 576 (4CIF)	
Power Supply	DC12V/AC	
Lens	25x Optical & 12x Digital/ 35x Optical & 12x Digital	
Auto Exposure	Automatic/Electronic Level Control	
Presets	More then 99 presets	
Frame Rate	25 FPS in all resolutions	
Minimum illumination	0.01 LUX	
S/n Ratio	Better then 50 dB	
Electronic Shutter	AUTO: 1/60STO 1/120,000S	AUTO: 1/50STO 1/12,000S
Auto White Balance (awb)	Yes	
Compression	MPEG4/H.264/MJPEG Support	
Auto Gain Control (agc)	Yes	
Panning Range	0°-360°	
Wide Dynamic Range	Off/BLC/WDR	
Tilting Range	5° Above Horizontal to 90° Down	
Streaming	Dual Compressed Stream	
OSD	Yes	
Operating Temperature	-10°C~+50°C	
Pre/Post Alarm Buffer	Yes	
Housing	Plastic/Aluminum with IP-66	