


HOODON PTZ CAMERA

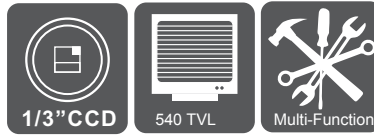

2251PT-ID/2251PT-OD

FEATURE

- High quality with multi-function Analog and Digital Zoom
- Alarm Input/Output”
- Auto IRIS Control
- Controlled by Key Button\RS 485\RS 422
- 256 Dome ID and Minimum 9 Groups
- DNR (Digital Noise Reduction)
- Day and Night Vision
- Auto/Zooming/1 Push/Manual Focus
- Internal Fan, Heater

SPECIFICATIONS

Mode	NTSC	PAL
Pick Up Element	1/3" CCD/1/4 CCD or better	
Image Signal Process	Digital Signal Processing System	
Number Of Pixel	768 (H) × 494 (V)	752 (H) × 582 (V)
Privacy Zone	8 Zones	
Horizontal Resolution	Approximately 540 TV Lines	
Power Supply	DC12V/AC	
Lens	25x Optical & 12x Digital/ 35x Optical & 12x Digital	
Auto Exposure	Automatic/Electronic Level Control	
Presets	More then 99 presets	
Scanning System	2 : 1 Interlace	
Minimum illumination	0.01 LUX	
S/n Ratio	Better then 50 dB	
Electronic Shutter	AUTO: 1/60STO 1/120,000S	AUTO: 1/50STO 1/12,000S
Auto White Balance (awb)	Yes	
Back Light Compensation (blc)	Off/Low/Medium/High Selectable	
Auto Gain Control (agc)	Yes	
Panning Range	0°-360°	
Wide Dynamic Range	On/Off	
Tilting Range	5° Above Horizontal to 90° Down	
Output	1 Vp-p Composite Video Output, 75 Ohm	
OSD	Yes	
Operating Temperature	-10°C~+50°C	
Scanning Frequency	15.625 KHz (H) and 50 Hz (V)	
Housing	Plastic/Aluminum with IP-66	